

# HX55ACR

COMPACT EXCAVATOR



Engine Output  
47.6 hp (35.5 kW)

Bucket Capacity  
0.15 m<sup>3</sup>

Operating Weight  
5355 kg



# BREAKING STANDARDS IN PRODUCTIVITY & PERFORMANCE

Introducing the new HX55A CR, the latest A-Series compact tracked excavator with minimal overhang. It benefits from a brand-new Stage V engine, delivering 35.5 kW (47.6 hp) gross power. With a load sensing system, 2 power modes and 2 speed travel, the compact radius machine is designed to be powerful yet efficient with a low Total Cost of Ownership (TCO).

## Greater efficiency

The HX55A CR's new engine meets EU Stage V emission regulations without the need of DEF, resulting in reduced maintenance costs.



**Compact power**

The HX55A CR is a compact tailswing machine with minimal overhang and offers more digging and lifting power. It is available as either a cabin or canopy version.



## Load sensing system

The HX55A CR is equipped with a hydraulic load sensing system to help reduce costs. It increases fuel efficiency when idling and increases power when needed for heavy lifting and other tough tasks.

## 2-way auxiliary piping

This feature comes as standard. A single or double acting mode can be selected by the operator.

## Quick coupler piping **OPTION**

A factory-fitted hydraulic line can be added to operate any hydraulic quick coupler. This allows quick changes of attachments without having to leave the cabin.

## 2 power modes

For less fuel consumption or greater power, the operator can choose the best mode as needed.

## 2 speed travel


A fuel saving feature which improves overall efficiency and productivity on the job site.

## Dozer blade float function

For greater versatility and speed, the blade automatically floats above the surface for smoother back grading. This allows the operator to clear and grade in one fluid motion.

## 4-way dozer blade **OPTION**

The new optional 4-way angle dozer blade offers a great solution for grading material, back-filling of trenches or snow removal. For even greater flexibility, the dozer blade angle can be adjusted from the cabin, for quick, precise levelling. The angle blade offers more versatility in your daily work by tilting sideways on top of the standard movements.

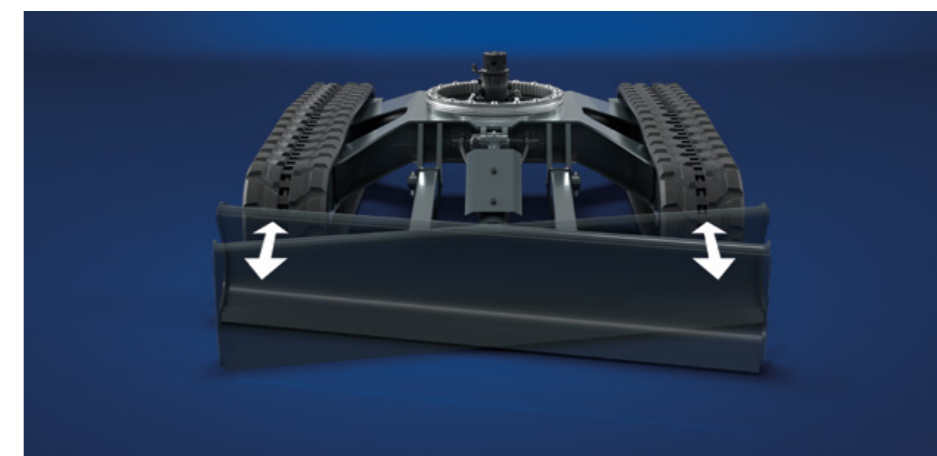



# BREAKING STANDARDS IN COMFORT & EASE OF USE

With its spacious interior and high-visibility design, our new cabin offers an unparalleled level of comfort and safety, while optimised ergonomics and advanced features allow you to work with greater ease and efficiency. All together, they are designed to help you operate for extended periods without fatigue or discomfort.



## ◀ New 5-inch digital display

A new, LCD full-colour display monitor allows you to easily control excavator settings and quickly access critical functions and daily operations. The monitor is also IP68 waterproof, especially important if working in a canopy model.

## Adjustable auxiliary pressure monitor

For improved speed and ease-of-use, you can adjust the hydraulic attachment flow using the digital display as standard.

## Auto-shift travel speed

This automated feature allows for seamless transitioning between high and low travel speeds, allowing the operator to focus on the task at hand while the machine makes the necessary adjustments.

## ◀ Excellent visibility

Experience a whole new level of vision with our latest cabin design. Enhanced visibility provides a wider and more expansive field of view, giving you a clear and unobstructed view of your surroundings.



## Proportional finger tip control **A**

Use the dozer blade lever with fingertip control to define the perfect driving speed when grading.

## Proportional joysticks **B**

Proportional joysticks as standard will greatly improve the operability of your machine and attachments.



## ◀ Modern audio system

Relax with convenient modern functions like the MP3 radio with added USB ports and enjoy hands free calls.

## Canopy version **OPTION**

The HX55A CR can be supplied in a canopy version to help improve your visibility even more.



# BREAKING STANDARDS IN SAFETY

HD Hyundai Compact Tracked Excavators have some of the highest safety standards in the industry, offering state-of-the-art features, some of which are unique in the industry. Our philosophy is to care for the machine, operator and the environment.

## Auto Safety Lock

The auto safety lock prevents unintentional ignition and machine movement. When the safety lever is locked, the engine cannot be started and the system will not engage.

## Overload warning

Available as standard, this warning device gives an audible and visible alarm when there's too much weight being lifted, to alert the operator.



## Safety valves

The safety valve on the boom, arm and dozer blade cylinder ensures safe digging or lifting with the blade down, even in case of a sudden pressure drop.

## Boom, arm & bucket cylinder guards

For greater durability and to provide increased protection, we have added new cylinder guards as standard to the boom, arm, and bucket. They effectively shield the hydraulic cylinders from damage caused by debris and other external factors, reducing the risk of downtime and costly repairs.



## Rear view camera (OPTION)

The HX55A CR has the option to include a rear-view camera, allowing a clear view of all your surroundings and improving overall safety.

## Anti-theft system

The system includes a password protected ignition key, to prevent the engine from starting without the correct key. Additionally, there is an optional GPS tracker (Hi MATE) that allows you to quickly locate the machine in case of theft.

## Cabin structure

The HX55A CR cabin structure is highly durable and uses integrally welded low-stress, high strength steel to meet all certifications.

- **ROPS:** Roll-Over Protective Structures ISO12117-2
- **TOPS:** Tip-Over Protective Structures EN13531
- **FOG:** Falling Object Guard, ISO10262 Level 1





# BREAKING STANDARDS IN SERVICEABILITY & TELEMATICS

The true value of HX A-Series machines lies in their durability with robust structures and attachments, as well as easy access for maintenance and long service intervals. Cutting-edge telematics allow owners and operators to access vital machine information onboard and remotely for greater machine management.



QUICK  
SERVICING FOR  
MAXIMUM  
**UPTIME**

## Designed for easy maintenance

A tiltable cabin and new cowl layout help maximise uptime and keep service work to a minimum.



## Dozer cylinder maintenance

Chassis connections allow for the easy replacement of hoses, ensuring easier servicing and maintenance.

## Improved attachment durability

Our upgraded attachments are designed to withstand the toughest work environments, featuring reinforced steel components and advanced welding techniques to ensure maximum strength and longevity.

# HiMATE

It's convenient, easy and valuable. Hi MATE, Hyundai's remote management system, utilises GPS satellite technology to provide customers with the highest level of service and product support available.

## Increase productivity

By providing information such as service hours, and idle time, Hi MATE saves you money and improves productivity. Service alerts enable better maintenance planning.

## Monitor your machines

Hi MATE's real-time location information allows convenient monitoring of your equipment via the Hi MATE website or mobile app.

## Improve Security

Protect your equipment from theft or unauthorised usage. Hi MATE's geofencing alerts notify you automatically when a machine leaves a predetermined zone.

## Mobile fleet app

Our new mobile app provides all the information you need to run your equipment more efficiently and economically. It has been optimised for fleet management, providing health insights based on telematic technology to keep your machines working at maximum performance.



## Keeping you covered

HD Hyundai Genuine Parts and Accessories are designed to keep your machine running at optimum performance, with 24-hour delivery across our dealer network. HD Hyundai Standard and Extended Warranty Programmes provide peace of mind and give you full control over your operating costs.





# HX55A CR SPECIFICATIONS

SPECIFICATIONS		HX55A CR
Model		HX55A CR
Operating weight	kg	5355

ENGINE		HX55A CR
Manufacturer		Yanmar
Model		4TNV86CT
Type		4 cycle, inline, water-cooled diesel engine
Emission standard		Stage V
Gross	hp (kW)	47.6 (35.5)
Net	hp (kW)	45 (33.6)
Peak torque	Nm	176.6
No. of cylinders		4
Bore x Stroke	mm	86 x 90
Displacement	cc	2091

HYDRAULIC SYSTEM		HX55A CR
Pump type		Load sensing system
Max. pressure	kgf/cm <sup>2</sup>	275
Max. flow rate	l/min	138
Aux. flow rate (2way)	l/min	75
Fuel tank capacity	l	66.8
Hydraulic capacity (tank/system)	l	44/63


PERFORMANCE		HX55A CR
Bucket breakout force (ISO)	kN (kgf)	43
Arm tearout force (ISO)	kN (kgf)	27
Travel speed (low/high)	km/h	2.6/4.7
Traction force	kg	5662
Swing speed	rpm	10

KEY SPECIFICATIONS		HX55A CR
Boom length	mm	2,800
Arm length	mm	1400/ 1650
Bucket capacity, std. SAE	m <sup>3</sup>	0.15
Boom swing angle left/right	degree	70/60
Rubber track width	mm	400
Ground pressure	kgf/cm <sup>2</sup>	0.29
<b>Sound level</b>		
Exterior sound level (2000/14/EC - ISO 6395:2008) Lwa	dB(A)	97
Interior sound level (ISO 6396:2008) Lpa	dB(A)	74.8
<b>Air conditioning</b>		The air conditioning system contains fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 0.70 kg of refrigerant representing a CO <sub>2</sub> equivalent of 1.00 metric tonnes.

\* All equipment dimension is based on cabin, standard boom/arm and counterweight.

# HX55A CR DIMENSIONS & WORKING RANGE

## MACHINE DIMENSIONS

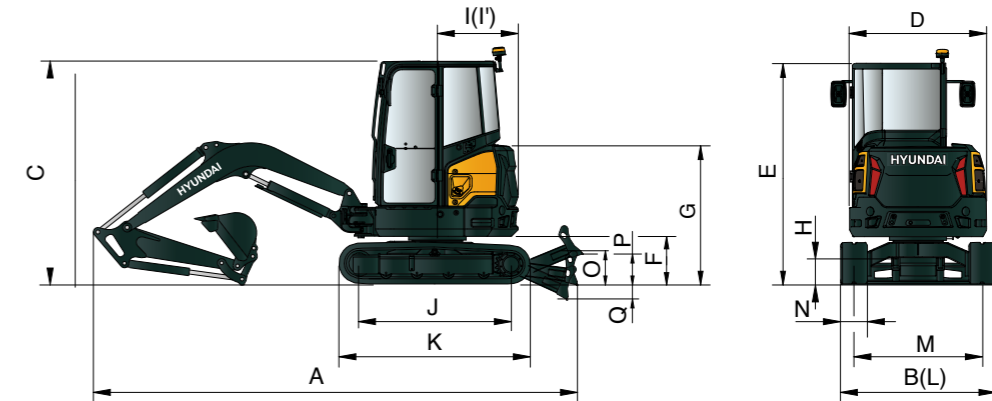


Unit: mm

	HX55A CR
A Overall length (with 1400mm arm)	5490
B Overall width	2000
C Overall height	2555
D Overall width of upperstructure	1850
E Overall height of canopy	2555
F Ground clearance of counterweight	608
G Overall height of engine hood	1605
H Minimum ground clearance	215
I Rear-end distance (with additional c/w)	1100 (1175)

	HX55A CR
I' Rear swing radius (with additional c/w)	1100 (1175)
J Distance between tumbler	2000
K Undercarriage length	2515
L Undercarriage width	2000
M Track gauge	1600
N Track width	400
O Height of blade	350
P Ground clearance of blade up	485
Q Depth of blade down	670

## WORKING RANGE

Unit: mm

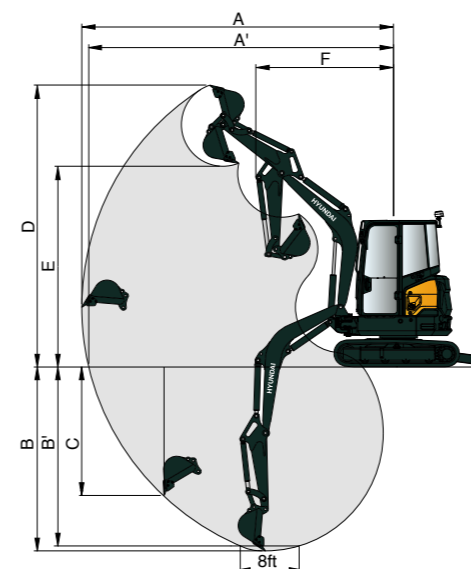

	HX55A CR	
Boom length	2800	
Arm length	1400	1650
A Max. Digging reach	5990	6230
A' Max. Digging reach on ground	5850	6100
B Max. Digging depth	3500	3750
B' Max. Digging depth (8' level)	3095	3380
C Max. Vertical wall digging depth	2650	2900
D Max. Digging height	5570	5740
E Max. Dumping height	3860	4035
F Min. Swing radius	2540	2580









# HX55A CR

## LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degrees











### HX55A CR

2.8m boom, 1.4m arm equipped with 400mm rubber track, dozer down position.

Lift-point height (m)		Lift-point radius						At max. Reach		
		2.0m		3.0m		4.0m		Capacity		Reach m
										
4.0m	kg							1120	970	3.97
3.0m	kg					*1070	960	1100	740	4.68
2.0m	kg			1670	1440	1250	930	1110	650	5.03
1.0m	kg			2250	1340	1470	890	1140	630	5.12
0.0m	kg			2430	1310	1590	870	1180	650	4.95
-1.0m	kg	*2690	2590	2260	1310	1510	860	1210	740	4.51
-2.0m	kg	*2740	*2650	1700	1340			1180	1010	3.65

### HX55A CR

2.8m boom, 1.65m arm equipped with 400mm, rubber track, dozer down position.

Lift-point height (m)		Lift-point radius						At max. Reach				
		1.0m		2.0m		3.0m		4.0m		Capacity		Reach m
												
4.0m	kg							960	960	1020	860	4.3
3.0m	kg							970	970	980	680	4.95
2.0m	kg					1480	1450	1160	930	960	600	5.28
1.0m	kg					2120	1350	1400	890	1010	580	5.36
0.0m	kg					2400	1290	1560	860	1090	590	5.2
-1.0m	kg	1820	1820	2380	2380	2320	1290	1540	850	1130	670	4.79
-2.0m	kg	3170	3170	3180	2600	1890	1310	1140	870	1130	870	4.01

- Lifting capacities are based on ISO 10567.
- Lifting capacity of the HX A-series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).
- (\*) indicates load limited by hydraulic capacity.
- Caution: please be aware of the local regulations and instructions for lifting operations.

# HX55A CR

## STANDARD/OPTIONAL EQUIPMENT

MODEL	HX55A CR
<b>ENGINE</b>	
Electrical controlled Yanmar engine	●
Double-element air filter	●
Auto-idling	●
Water separator with filter	●
Electric fuel filler pump	□
<b>HYDRAULIC SYSTEM</b>	
Load-sensing hydraulic system	●
Two-speed travel with auto-shift	●
Dozer blade floating function	●
Angle dozer blade	□
Pressure accumulator	●
Proportional Aux. control	□
1 way Aux. hydraulic line for breaker	●
2 way Aux. hydraulic line for grapple	□
4 way Aux. hydraulic line for rotating	□
Divert valve for 2 way hydraulic	□
Adjustable Aux. flow on cluster	●
<b>CABIN</b>	
ROPS (Roll-over protective structure, ISO12117-2)	●
FOG Level 1 (Falling-object guard, ISO10262)	□
Heated Adjustable Mechanical Suspension Seat	●
Retractable seatbelt with warning alarm	●
Heating & Air Conditioning	●
Travel levers with foot pedals	●
Power-assisted front window	●
Rear view camera	□
Travel alarm	●
LED beacon lamp	□
5" Digital cluster with IP68 water & dust proof	●
Radio with USB	●
12V power socket	●
Side & Rear Mirrors	●
Cup holder	●

MODEL	HX55A CR
<b>CANOPY</b>	
ROPS (Roll-over Protective structure, ISO3471)	●
OPS (Operator Protective Guard) Level 1	□
Heated Adjustable Mechanical Suspension Seat	●
Retractable seatbelt with warning alarm	●
Travel levers with foot pedals	●
5" Digital cluster with IP68 water & dust proof	●
12V power socket	●
Side Mirror	●
Cup holder	●
Horn	●
<b>WORKING EQUIPMENT</b>	
Boom swing function	●
Long arm option	□
Quick coupler piping	□
Additional counter weight option	□
Safety valves for Boom/Arm/Dozer blade	●
Overload warning alarm	●
Travel & Swing motor with discs brake	●
1 LED work light on boom	●
2 LED work lights on cabin	□
<b>UNDERCARRIAGE</b>	
Rubber track	●
Steel track	□
Interchangeability between rubber and steel track	●
<b>TELEMATICS</b>	
Hyundai telematic system Hi MATE	□

- Standard
- Optional





HYUNDAI

HX55ACR

ZONE



# HYUNDAI



HD Hyundai Construction Equipment Europe nv, Hyundailaan 4,  
3980 Tessenderlo, Belgium. Tel: (32) 14-56-2200

Specifications and design are subject to change without notice.  
Pictures of HD Hyundai Construction Equipment Europe products may  
show other than standard equipment.



Scan to find out more  
about this product.

**READY TO CHANGE YOUR WORLD?**

Contact your HD Hyundai dealer.  
[hyundai-ce.eu/en/dealer-locator](https://hyundai-ce.eu/en/dealer-locator)